



STANDARD

series





STANDARD | Track series



Model	Power	Install	Length
1 Meter profile	200W max	Surface/Pendant/Recessed	1000mm
2 Meter profile	200W max	Surface/Pendant/Recessed	2000mm
3 Meter profile	200W max	Surface/Pendant/Recessed	3000mm


■ Sandy Black □ Sandy White ■ Golden ■ Black bronze



CORNER


L Corner

■ Sandy Black □ Sandy White




Inner Corner

■ Sandy Black □ Sandy White




Outer Corner

■ Sandy Black □ Sandy White




T corner

■ Sandy Black □ Sandy White




45D corner

■ Sandy Black □ Sandy White



CROSS corner


■ Sandy Black □ Sandy White



POWER FEED

Input terminal

■ Sandy Black □ Sandy White




STANDARD | Track series



Model	Power	Install	Length
1 Meter profile-R	200W max	Recessed	1000mm
2 Meter profile-R	200W max	Recessed	2000mm
3 Meter profile-R	200W max	Recessed	3000mm


■ Sandy Black □ Sandy White



CORNER

L Corner-R

■ Sandy Black □ Sandy White




Inner Corner-R

■ Sandy Black □ Sandy White




Outer Corner-R

■ Sandy Black □ Sandy White



T Corner-R


■ Sandy Black □ Sandy White



POWER FEED


Input terminal-R

■ Sandy Black □ Sandy White




ACCESSORIES


Pendant kit-A



Pendant kit-B




Pendant kit-C



Track connector



Power plate 65mm




Pin




Track cover




Track driver box



Driver box



End cap



New surface mounted kits



Recessed kit





DOT01



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
2W	> 90 > 80	< 3	3000K 2700K 4000K	12° 34° 48°	126Lm

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION
3000K 90Ra

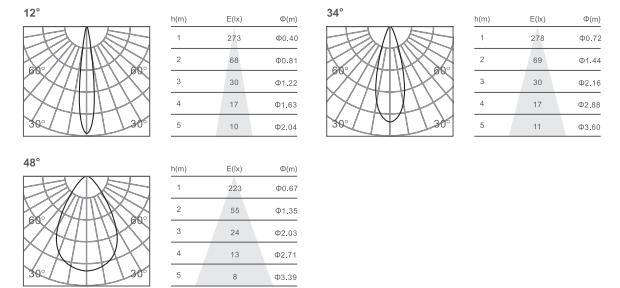



DOT03



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90 > 80	< 3	3000K 2700K 4000K	12° 34° 48°	382Lm

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION
3000K 90Ra

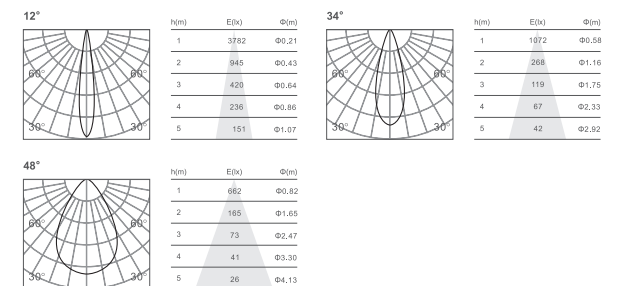



DOT06





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	12°	733Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	5723	Φ0.21
2	1431	Φ0.42
3	635	Φ0.63
4	357	Φ0.84
5	228	Φ1.05



h(m)	E(lx)	Φ(m)
1	1807	Φ0.63
2	451	Φ1.26
3	200	Φ1.89
4	112	Φ2.52
5	72	Φ3.15



h(m)	E(lx)	Φ(m)
1	1287	Φ0.79
2	321	Φ1.58
3	143	Φ2.37
4	80	Φ3.16
5	51	Φ3.95

DOT12





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	12°	1440Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	11430	Φ0.21
2	2857	Φ0.42
3	1270	Φ0.63
4	714	Φ0.85
5	457	Φ1.06



h(m)	E(lx)	Φ(m)
1	3545	Φ0.62
2	889	Φ1.25
3	393	Φ1.88
4	221	Φ2.51
5	141	Φ3.14



h(m)	E(lx)	Φ(m)
1	2773	Φ0.79
2	693	Φ1.58
3	308	Φ2.37
4	173	Φ3.16
5	110	Φ3.95



Linear08





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90	< 3	3000K	Diffuse	223Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	88	Φ2.38
2	22	Φ4.77
3	9	Φ7.16
4	5	Φ9.55
5	3	Φ11.94

Linear16





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
7W	> 90	< 3	3000K	Diffuse	488Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	189	Φ2.46
2	47	Φ4.92
3	21	Φ7.38
4	11	Φ9.84
5	7	Φ12.30




Linear32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
13W	> 90	< 3	3000K	Diffuse	895Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION

3000K 90Ra




Linear96




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
39W	> 90	< 3	3000K	Diffuse	2550Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION

3000K 90Ra




Linear64




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
26W	> 90	< 3	3000K	Diffuse	1720Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION

3000K 90Ra






Fold03




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90	< 3	3000K	12°	382Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION

3000K 90Ra

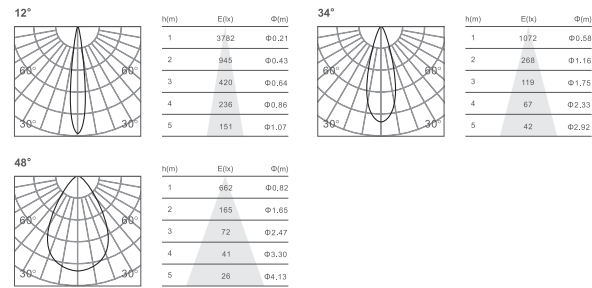


Fold12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	12°	1440LM
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION

3000K 90Ra

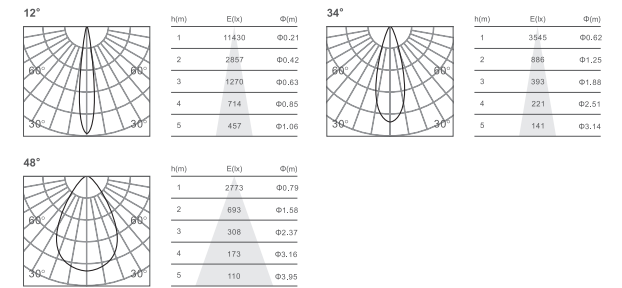


Fold06




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	12°	733Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION

3000K 90Ra

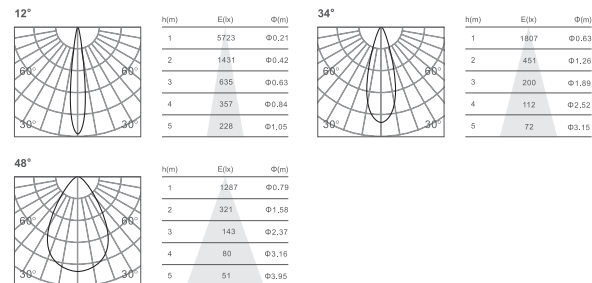




Fold08




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90	< 3	3000K	Diffuse	223Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION
3000K 90Ra




Fold32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	Diffuse	1270Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION
3000K 90Ra




Fold16




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	Diffuse	488Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION
3000K 90Ra





Washer13




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	wallwasher	480Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



Wallwasher



h(m)	E(lx)	Φ(m)
1	324	Φ0.84
2	81	Φ1.68
3	36	Φ2.52
4	20	Φ3.36
5	12	Φ4.20



Out32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
13W	> 90	< 3	3000K	Diffuse	895Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



Diffuse



h(m)	E(lx)	Φ(m)
1	344	Φ2.47
2	86	Φ4.94
3	38	Φ7.41
4	21	Φ9.88
5	13	Φ12.35



Washer27




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	wallwasher	1055Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



Wallwasher



h(m)	E(lx)	Φ(m)
1	704	Φ0.85
2	176	Φ1.70
3	78	Φ2.55
4	44	Φ3.40
5	28	Φ4.25



Out12



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	12°	1435Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra




12°




h(m)	E(lx)	Φ(m)
1	11430	Φ0.21
2	2857	Φ0.42
3	1270	Φ0.63
4	714	Φ0.85
5	457	Φ1.06

34°



h(m)	E(lx)	Φ(m)
1	3545	Φ0.62
2	886	Φ1.25
3	393	Φ1.88
4	221	Φ2.51
5	141	Φ3.14

48°



h(m)	E(lx)	Φ(m)
1	2773	Φ0.79
2	693	Φ1.58
3	308	Φ2.37
4	173	Φ3.16
5	110	Φ3.95