




MINI



series



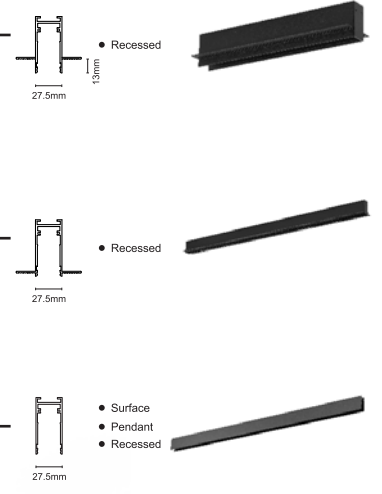


Model	Power	Install	Length
1 Meter profile	200W max	Surface/Pendant/Recessed	1000mm
2 Meter profile	200W max	Surface/Pendant/Recessed	2000mm
3 Meter profile	200W max	Surface/Pendant/Recessed	3000mm

Sandy Black
 Sandy White
 Golden
 Black bronze



Model	Power	Install	Length
1 Meter profile-R-s	200W max	Recessed	1000mm
2 Meter profile-R-s	200W max	Recessed	2000mm
3 Meter profile-R-s	200W max	Recessed	3000mm


Sandy Black
 Sandy White



CORNER


L corner-s

Sandy Black
 Sandy White




Inner corner-s

Sandy Black
 Sandy White




Outer corner-s

Sandy Black
 Sandy White



T corner-s

Sandy Black
 Sandy White




45D corner-s

Sandy Black
 Sandy White



Cross corner-s


Sandy Black
 Sandy White



CORNER


L corner-R-s

Sandy Black
 Sandy White




Inner corner-R-s

Sandy Black
 Sandy White




Outer corner-R-s

Sandy Black
 Sandy White



T corner-R-s


Sandy Black
 Sandy White





Model	Power	Install	Length
1 Meter profile-M-s	200W max	Recessed	1000mm
2 Meter profile-M-s	200W max	Recessed	2000mm
3 Meter profile-M-s	200W max	Recessed	3000mm

■ Sandy Black □ Sandy White




Dot06-s



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
6W	> 90	< 3	3000K	20°	510Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White


LIGHT DISTRIBUTION
3000K 90Ra

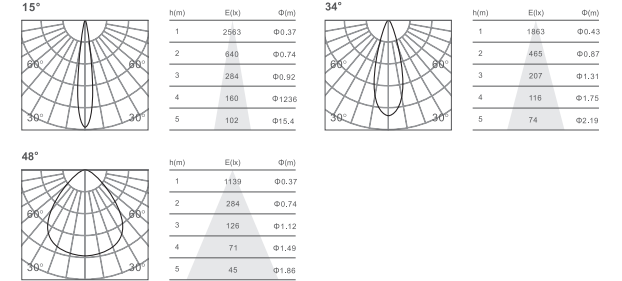

CORNER


L Corner-M-s

■ Sandy Black □ Sandy White




Inner Corner-M-s

■ Sandy Black □ Sandy White



Outer Corner-M-s

■ Sandy Black □ Sandy White




Dot12-s



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 90	< 3	3000K	20°	1020Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION
3000K 90Ra

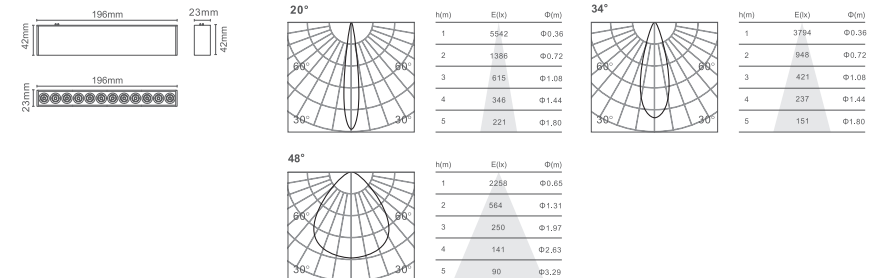



Dot24-s





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
24W	> 90	< 3	3000K	20°	1875Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	101121	Φ0.36
2	2528	Φ0.73
3	1124	Φ1.10
4	632	Φ1.47
5	404	Φ1.84



h(m)	E(lx)	Φ(m)
1	7111	Φ0.42
2	1778	Φ0.85
3	790	Φ1.28
4	444	Φ1.71
5	284	Φ2.14



h(m)	E(lx)	Φ(m)
1	4857	Φ0.65
2	1014	Φ1.30
3	450	Φ1.98
4	253	Φ2.61
5	162	Φ3.27



Linear10-s





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90	< 3	3000K	Diffuse	230Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	88	Φ2.37
2	22	Φ4.74
3	9	Φ7.12
4	5	Φ9.49
5	3	Φ11.86

Linear20-s





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	Diffuse	605Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	239	Φ2.35
2	59	Φ4.70
3	26	Φ7.05
4	14	Φ9.40
5	9	Φ11.75



Linear40-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
15W	> 90	< 3	3000K	Diffuse	1015Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White


LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	389	Φ2.47
2	97	Φ4.95
3	43	Φ7.43
4	24	Φ9.91
5	15	Φ12.38



Linear80-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
30W	> 90	< 3	3000K	Diffuse	1970Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	773	Φ2.42
2	193	Φ4.85
3	85	Φ7.27
4	48	Φ9.70
5	30	Φ12.12

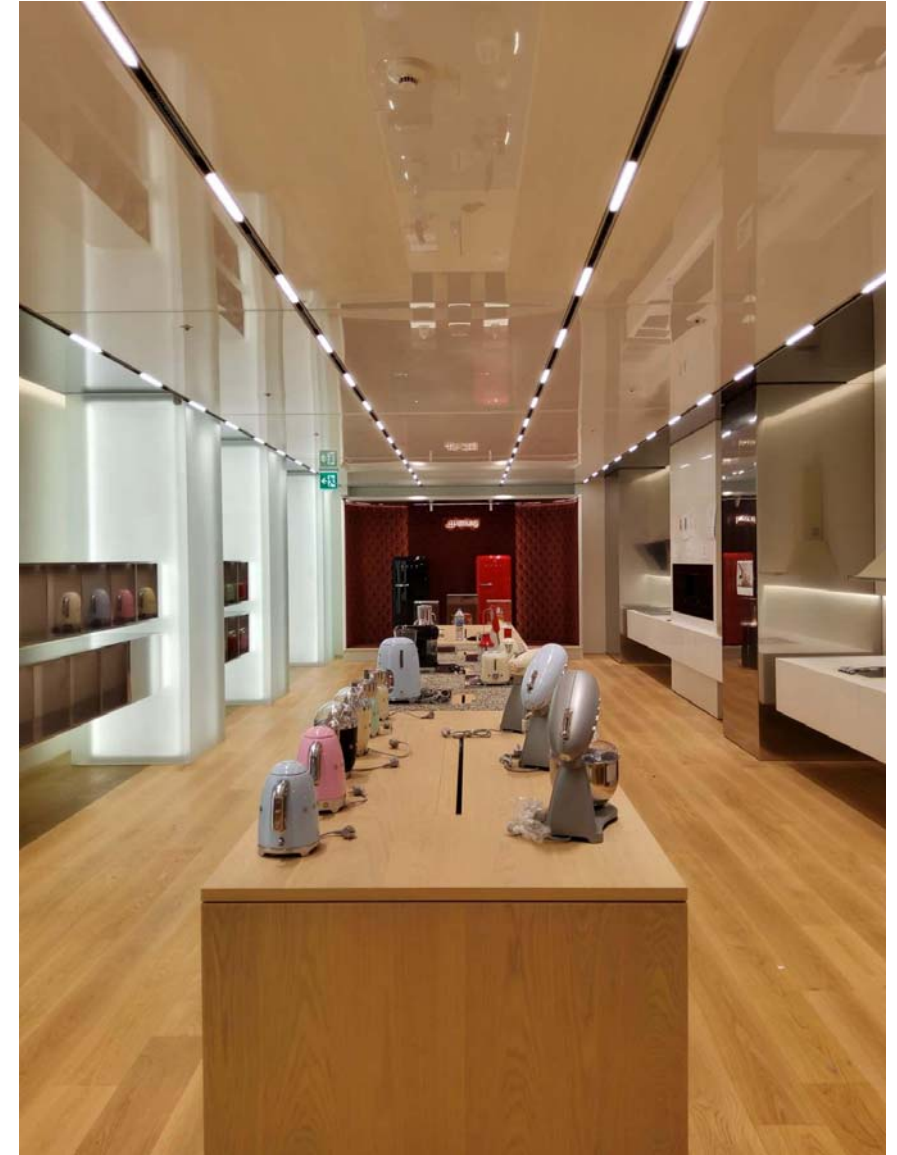




Fold06-s



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	20°	685Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION


3000K 90Ra

20°




h(m)	E(lx)	Φ(m)
1	3497	Φ0.36
2	864	Φ0.72
3	384	Φ1.08
4	216	Φ1.44
5	138	Φ1.81

34°



h(m)	E(lx)	Φ(m)
1	2422	Φ0.42
2	655	Φ0.85
3	291	Φ1.28
4	163	Φ1.71
5	104	Φ2.14

48°



h(m)	E(lx)	Φ(m)
1	1490	Φ0.66
2	372	Φ1.33
3	165	Φ1.99
4	93	Φ2.66
5	59	Φ3.32




Fold10-s



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	Diffuse	625Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	187	Φ2.42
2	41	Φ4.84
3	18	Φ7.26
4	10	Φ9.68
5	6	Φ12.10




Fold12-s



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	20°	1150Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION


3000K 90Ra

20°




h(m)	E(lx)	Φ(m)
1	5895	Φ0.36
2	1474	Φ0.73
3	655	Φ1.09
4	368	Φ1.46
5	235	Φ1.82

34°



h(m)	E(lx)	Φ(m)
1	4222	Φ0.43
2	1056	Φ0.87
3	469	Φ1.31
4	263	Φ1.74
5	168	Φ2.18

48°



h(m)	E(lx)	Φ(m)
1	2303	Φ0.69
2	575	Φ1.38
3	255	Φ2.07
4	143	Φ2.76
5	92	Φ3.45




Fold20-s



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	Diffuse	990Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	388	Φ2.43
2	97	Φ4.87
3	43	Φ7.31
4	24	Φ9.75
5	15	Φ12.19



Out12-s





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 90	< 3	3000K	Diffuse	1040Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	5542	Φ0.36
2	1386	Φ0.72
3	615	Φ1.08
4	346	Φ1.44
5	221	Φ1.80



h(m)	E(lx)	Φ(m)
1	3794	Φ0.43
2	948	Φ0.87
3	421	Φ1.31
4	237	Φ1.75
5	151	Φ2.18



h(m)	E(lx)	Φ(m)
1	2258	Φ0.65
2	564	Φ1.31
3	250	Φ1.97
4	141	Φ2.63
5	90	Φ3.29

Out40-s





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
15W	> 90	< 3	3000K	Diffuse	1015Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	388	Φ2.47
2	97	Φ4.95
3	43	Φ7.43
4	24	Φ9.91
5	15	Φ12.38



Wallsher20-s





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 90	< 3	3000K	Diffuse	750Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	493	Φ0.82
2	101	Φ1.64
3	44	Φ2.46
4	25	Φ3.28
5	16	Φ4.10

Wallsher30-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
18W	> 90	< 3	3000K	Diffuse	1140Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	585	Φ0.85
2	149	Φ1.70
3	66	Φ2.56
4	37	Φ3.41
5	23	Φ4.27