






Specifications

UFO LED High Bay Light



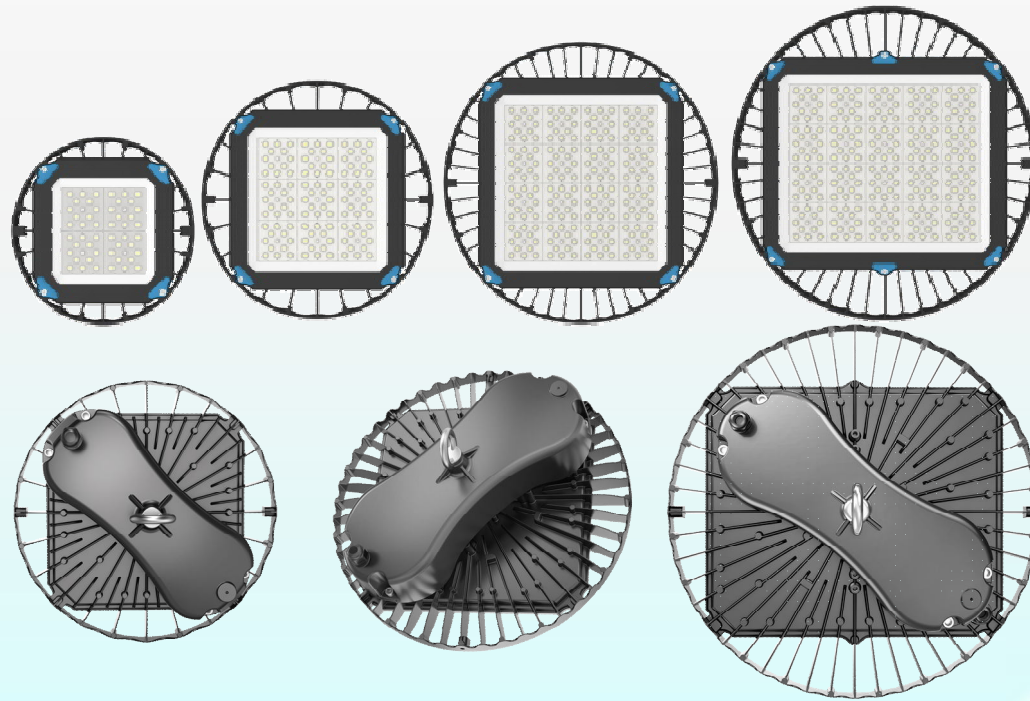


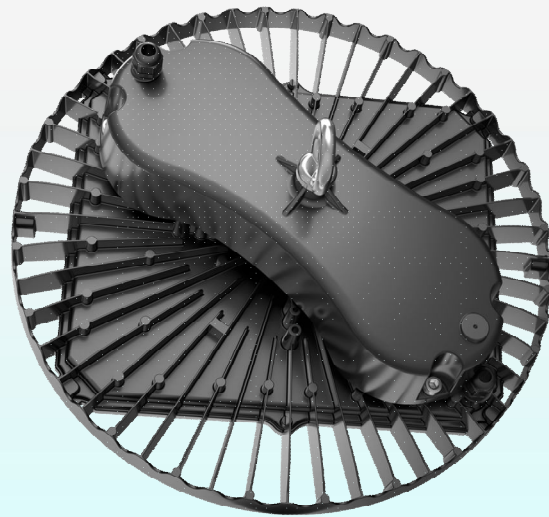




100W

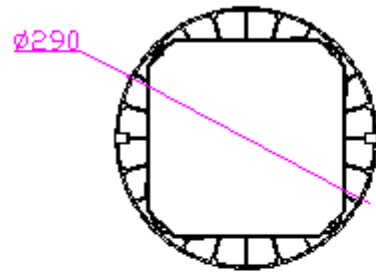

150W

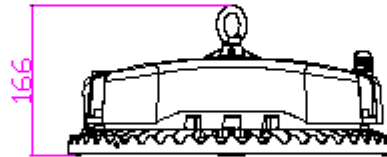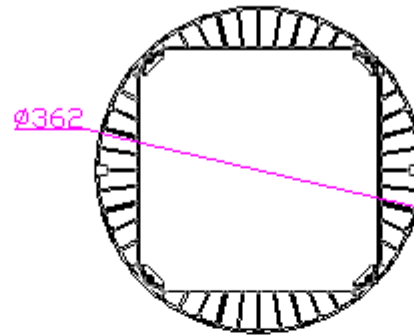


200W

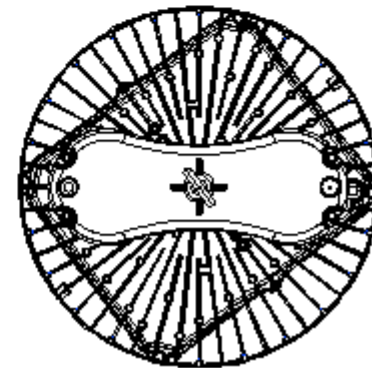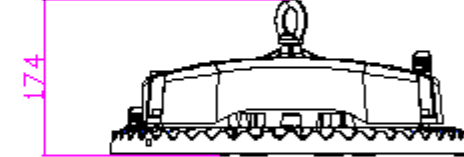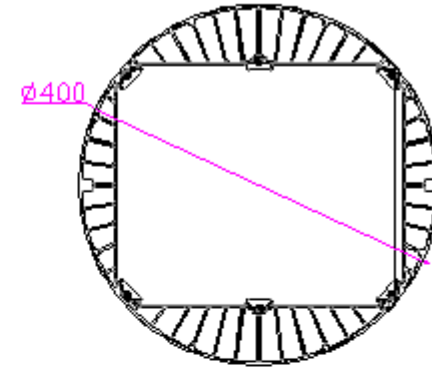

Product Dimensions

Item No.	Diameter*Thickness
HB-S3-50	φ215*97mm
HB-S3-100	φ290*153mm
HB-S3-150	φ362*153mm
HB-S3-200	φ400*163mm
HB-S3-240	φ400*163mm

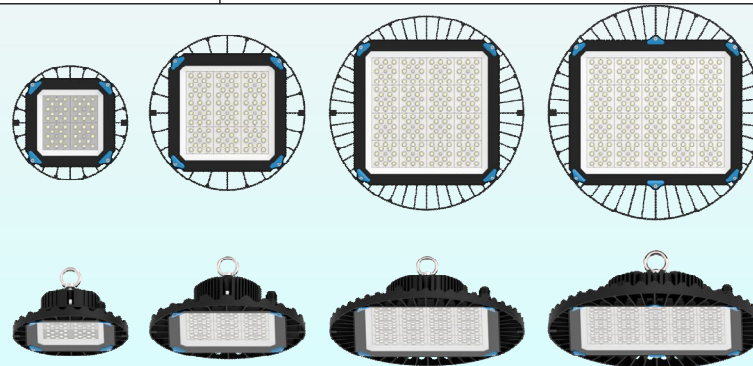

1. Descriptions

- ◆ UFO LED High Bay light
- ◆ Ideal replacement of fluorescent fixtures
- ◆ Perfect to apply in: warehouse, factories, supermarket, exhibition center, convention hall, industrial places, etc

2. Characteristics

- ◆ Private mould, unique design
- ◆ IP65, waterproof construction
- ◆ Modularized design - easy maintenance
- ◆ Integrated die-casting aluminum housing, elegant appearance
- ◆ Good heat dissipation, long lifespan
- ◆ Tempered glass, surface coating process, excellent corrosion-proof
- ◆ High efficiency, 120lm/W
- ◆ Lens with 30/60/90/120°/TYPE3
- ◆ 5 years warranty


Applications



Technical Parameters

Power	50w	100w	150w	200w	240w
Voltage	AC200-240V				
CRI	Ra.80				
Efficacy	120lm/w				
CCT	3000k/4000k/6000k				
Beam Angle	30° /60° /90° /120° /TYPE3				
Material	Integrated die-casting aluminum ADC12				
Light Source	SMD3030				
LED Qty	48pcs	108pcs	192pcs	240pcs	240pcs
Operating Temperature	-40℃ ~ 50℃				
Humidity	10%~90%				
IP Rate	IP65				
Certifications	Complied to CE/RoHS/CB/SAA				
Warranty	3/5 years warranty				
Notes	Private tooling, with lens per LED				


Distribution Curve Flux

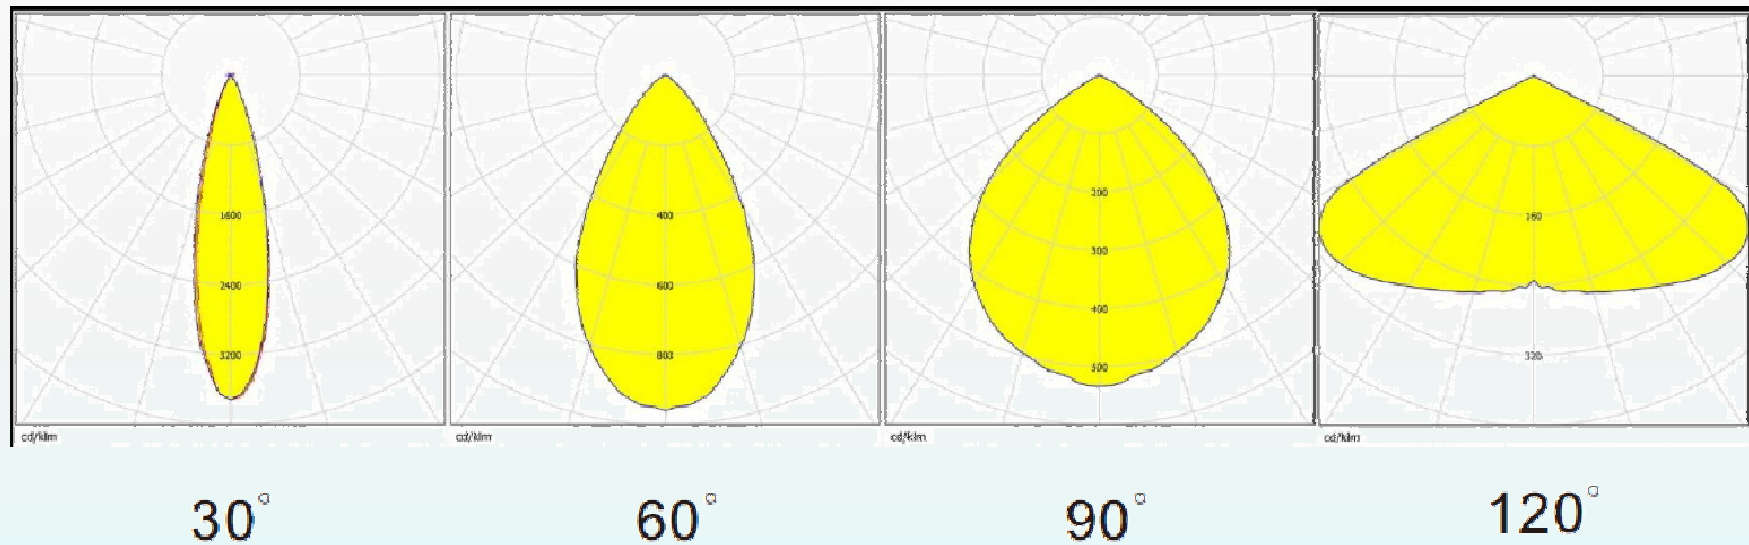

Packing Details

Power	Inner box size (mm)	Qty/Inner box (pcs)	G.W/inner box(kg)	Outer box size (mm)	Qty/outer box(pcs)	G.W/Outer box(kg)
50w	/	/	/	238*238*130	1	2.0
100w	/	/	/	312*312*137	1	2.8
150w	/	/	/	384*384*137	1	3.4
200w	/	/	/	422*422*137	1	4.0
240w	/	/	/	422*422*137	1	4.0

Installation

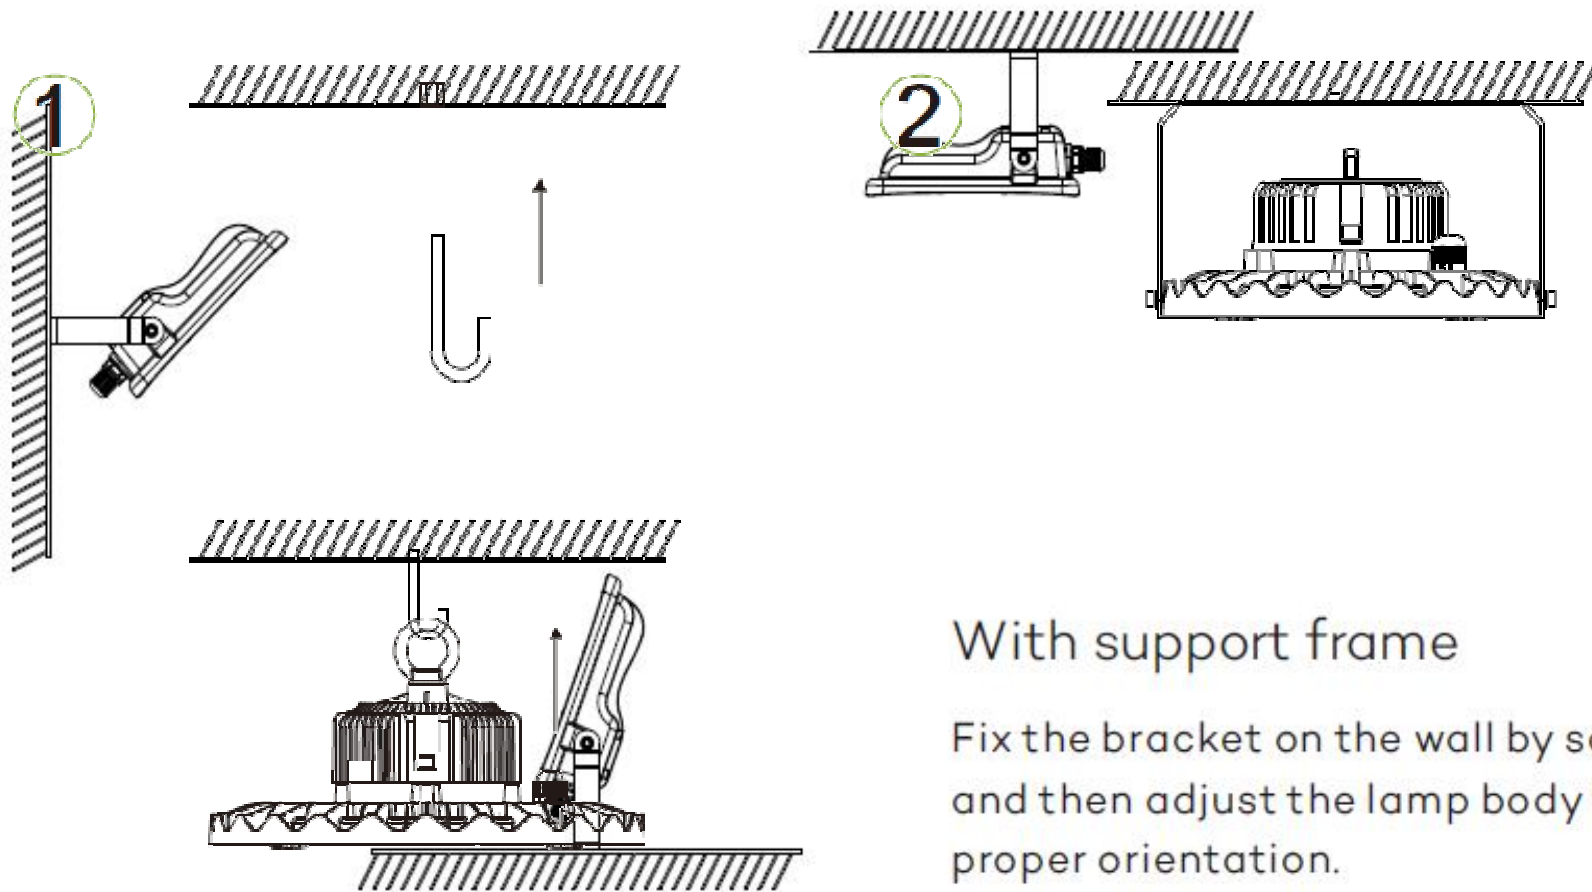

With support frame

Fix the bracket on the wall by screws and then adjust the lamp body to proper orientation.

Notes:

1. Please refer to instructions carefully to ensure installing and connecting power correctly
2. Please check everything carefully before using, If have any abnormalities occurred during use, please contact us immediately
3. It is a normal phenomenon that the surface temperature of the lamp housing get higher during use.
4. Please do not disassemble the lamp without permission, or it will be deemed to have waived the warranty service
5. For products with special function, the corresponding sections in this manual is for reference only.